

The Better 1N5811: 1N7066 - 1N7068 Series


- 10A, 50 - 150V Hyper Fast Recovery Rectifiers
- High Surge Current of 325A max
- Low Forward Voltage Drop of 0.95V @ 10A
- Void Free Chip Construction
- Hermetically Sealed
- Solid Silver Leads
- JEDEC Registered



Available in axial and surface mount square tab (SMS) packages

*Diameter of SMS approximately 22% larger than 1N5811US

Available TX, TXV, and S-Level screening are based on MIL-PRF-19500 guidelines. Screening flows are available upon request.

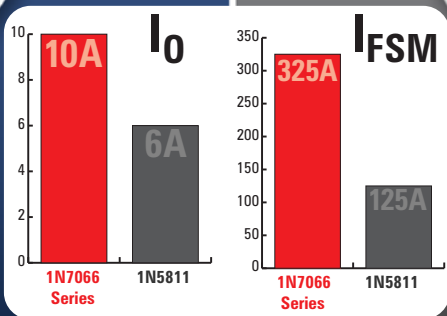

Solid State Devices, Inc.

14701 Firestone Blvd. La Mirada, CA 90638

(562) 404-4474 | FAX (562) 404-1773

www.ssdi-power.com | ssdi@ssdi-power.com