



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, CA 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SPMQ613-01

600V, 200A FAST SWITCHING IGBT HALF BRIDGE

Designer's Data Sheet

Part Number/Ordering Information ^{1/}

SPMQ613-01

L Screening ^{2/}

— = Not Screened

TX = TX Level

TXV = TXV Level

S = S Level

FEATURES:


- Hermetic construction, electrically isolated from the heatsinking baseplate
- Fast switching
- Single IGBT die (no paralleling) with ultrafast freewheeling diode
- Low switching and conduction losses
- TX, TXV, and Space Level Screening Available

MAXIMUM RATINGS ^{3/}	SYMBOL	VALUE	UNIT
Collector – Emitter Breakdown Voltage	V_{CES}	600	V
Gate – Emitter Voltage	V_{GES}	±20	V
Max. Continuous Collector Current	I_{C1} I_{C2}	200 100	A
	@ $T_C = 25^{\circ}\text{C}$ @ $T_C = 90^{\circ}\text{C}$		
Pulsed Collector Current	I_{CM}	300	A
Clamped Inductive Load Current ($T_J = 125^{\circ}\text{C}$)	I_{LM}	100	A
Reverse Voltage Avalanche Energy ($I_C = 100\text{A}$)	E_{ARV}	5.6	mJ
Operating & Storage Temperature	$T_{OP} \& T_{STG}$	-55 to +150	°C
Maximum Thermal Resistance (Junction to Case) Per switch	$R_{\theta JC}$	0.50	°C/W
Total Device Dissipation @ $T_C = 25^{\circ}\text{C}$	P_{D1}	250	W
Dissipation Derating From @ $T_C = 25^{\circ}\text{C}$ to $T_C = 150^{\circ}\text{C}$	P_{D2}	2	W/°C

Notes: ^{1/} For ordering information, price, and availability- Contact factory.

^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.

^{3/} Unless otherwise specified, all electrical characteristics @25°C.

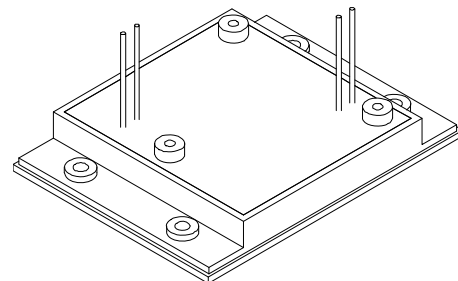

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0027A

DOC



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, CA 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SPMQ613-01

ELECTRICAL CHARACTERISTICS ^{3/}		SYMBOL	MIN	TYP	MAX	UNIT
Collector - Emitter Breakdown Voltage ($I_{CES} = 250\mu A$, $V_{GE} = 0V$)		BV_{CES}	600	670	—	V
Gate - Emitter Threshold Voltage ($I_C = 0.25mA$, $V_{CE} = V_{GE}$)		$V_{GE(th)}$	2.5 — —	5.2 5.0 6.0	6 — —	V
Collector - Emitter Saturation Voltage		$V_{CE(on)}$	— —	1.70 2.15 2.35 3.00 1.65 2.20 2.70 1.70 2.25 2.90	2.4 — — — 2.2 — — — — — —	V
Gate - Emitter Leakage Current ($V_{GE} = \pm 20V$, $V_{CE} = 0V$)		I_{GES}	—	0.01 0.05 0.005	1.0 10 —	μA
Collector Leakage Current ($V_{CE} = 600V$, $V_{GE} = 0V$)		I_{CES1} I_{CES2} I_{CES3}	— — —	25 7 2.5	200 — —	μA mA μA
Forward Transconductance ($I_C = I_{C2}$, $V_{CE} = 10V$)		g_{fs}	20	—	—	S
Gate Charge Total Gate Charge Gate-Emitter Charge Gate-Collector Charge		$Q_{g(on)}$ Q_{ge} Q_{gc}	— — —	575 70 320	650 150 370	nC
Capacitance Input Capacitance Output Capacitance Reverse Transfer Capacitance		C_{ies} C_{oes} C_{res}	— — —	84001 400 600	10,000 2,000 1,000	pF
Resistive Switching Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time		$t_{d(on)}$ t_r $t_{d(off)}$ t_f	— — — —	150 550 550 2000	— — — —	nsec
Inductive Switching Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time		$t_{d(on)}$ t_r $t_{d(off)}$ t_f	— — — —	150 140 600 300	500 175 1000 500	nsec
ANTI-PARALLEL DIODE						
Peak Current		I_{pk}	—	—	200	A
Peak Inverse Voltage		PIV	—	—	600	V
Average Current		I_{avg}	—	—	100	A
Diode Forward Voltage @ $I_F=100A$, $T_J=25^\circ C$		V_F	—	1.1 1.6 1.8 1.4	1.5 — — —	V
Reverse Recovery Time ($I_F=40A$, $di/dt=200A/\mu sec$)		t_{rr}	—	200	2000	nsec

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0027A

DOC



Solid State Devices, Inc.



14701 Firestone Blvd * La Mirada, CA 90638

Phone: (562) 404-4474 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

SPMQ613-01

CASE OUTLINE: ASPM

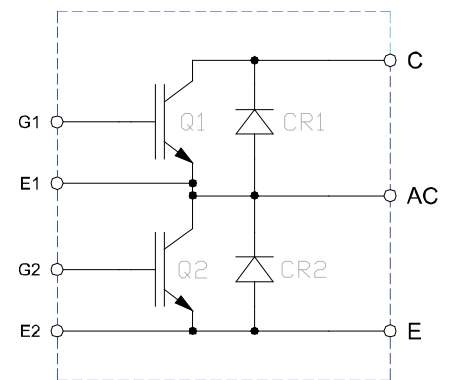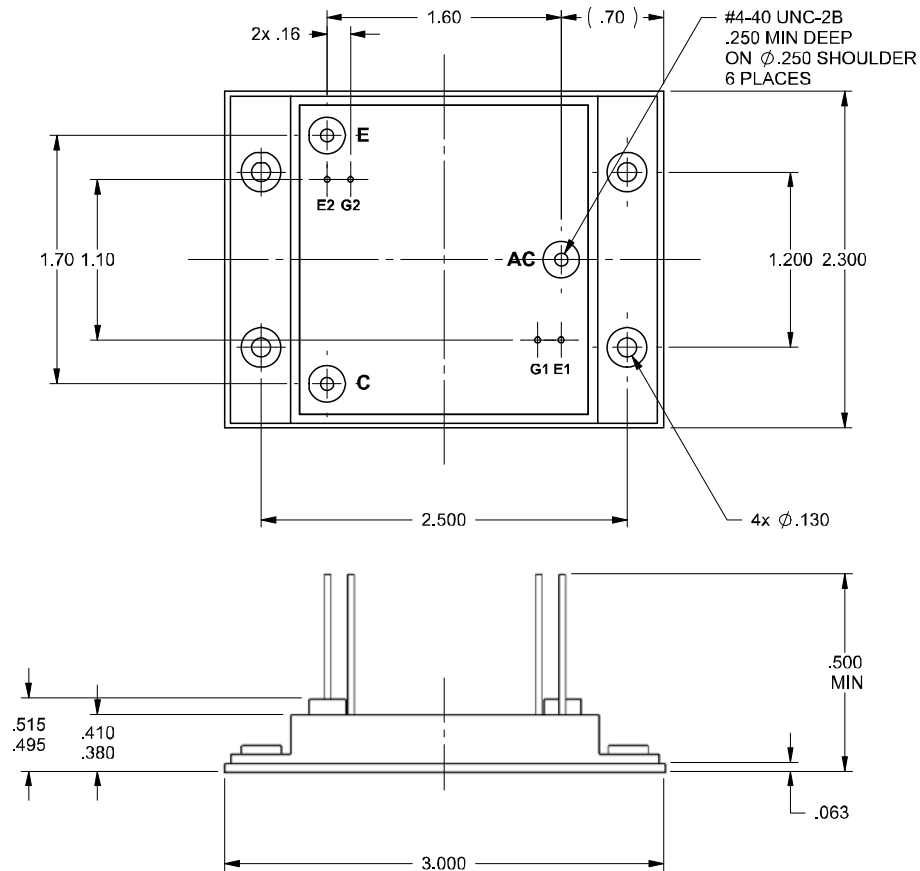

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: PM0027A

DOC