



SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet

FEATURES:


- Low Forward Voltage Drop
- Low Reverse Leakage
- Hermetically Sealed Power Package
- Guard Ring for Overvoltage Protection
- Available in Isolated and non-Isolated Versions
- Eutectic Die Attach
- 175°C Operating Junction Temperature

- TX, TXV and Space Level Screening Available

SSR8045/3

**80AMPS
45 VOLTS
SCHOTTKY
RECTIFIER**

TO-3



Available in Following Configurations:

SSR8045/3 - Rectifier

SSR8045CT/3 - Common Cathode (See Data Sheet RS0057)

SSR8045CA/3 - Common Anode (See Data Sheet RS0057)

SSR8045CA/3 - Doubler (See Data Sheet RS0057)

Maximum Ratings	SYMBOL	VALUE	UNITS
Peak Repetitive Reverse and DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current. (Resistive load, 60Hz, Sine Wave, $T_A = 25^\circ\text{C}$)	I_o	80	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on I_o , allow junction to reach equilibrium between pulses, $T_A = 25^\circ\text{C}$)	I_{FSM}	600	Amps
Operating and Storage Temperature	T_{OP} & T_{stg}	-65 TO +175	$^\circ\text{C}$
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	0.7	$^\circ\text{C/W}$

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RS0051B

SSR8045/3



SOLID STATE DEVICES, INC.


14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

Electrical Characteristics	SYMBOL	MINIMUM	MAXIMUM	UNITS
Instantaneous Forward Voltage Drop ($T_A = 25^\circ\text{C}$, 300 μsec Pulse) $I_F = 20\text{A}$ $I_F = 40\text{A}$ $I_F = 80\text{A}$	V_{F1}	--	0.50	V_{DC}
	V_{F2}	--	0.58	
	V_{F3}	--	0.72	
Instantaneous Forward Voltage Drop ($I_F = 40\text{A}$, $T_A = -55^\circ\text{C}$, 300 μsec pulse)	V_{F4}	--	0.65	V_{DC}
Reverse Leakage Current (Rated V_R , 300 μs pulse min.) $T_A = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$	I_{R1}	--	800	μA
	I_{R2}	--	60	mA
Junction Capacitance ($V_R = 10V_{DC}$, $T_A = 25^\circ\text{C}$, $f = 1\text{MHz}$)	C_J	--	3200	pF

CASE OUTLINE: TO-3

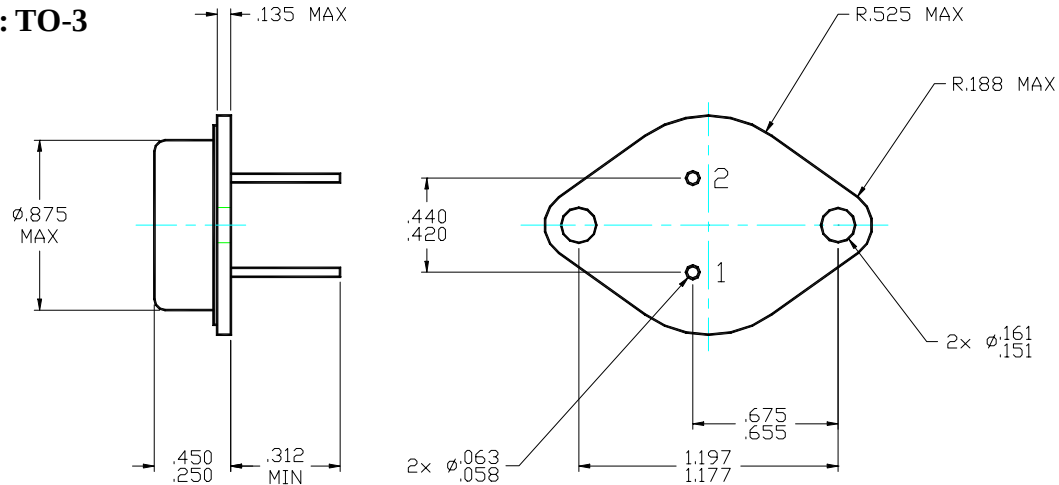

PIN ASSIGNMENT

CODE	FUNCTION	PIN 1	PIN 2	CASE
--	Rectifier	Anode	Anode	Cathode

TYPICAL OPERATING CURVES

($T_A = 25^\circ\text{C}$ unless otherwise specified)

