



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638

Phone: (562) 404-4474 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet

Part Number / Ordering Information ^{1/}

SHM

L Screening^{2/} = None

TX = TX Level

TXV = TXV Level

S = S Level

L Package

___ = Axial

SMS = Surface Mount Square Tab

L Voltage

15 = 1500

50 = 5000

20 = 2000

60 = 6000

25 = 2500

80 = 8000

30 = 3000

100 = 10000

40 = 4000

SHM15 - SHM100

and

SHM15SMS - SHM100SMS

100-250 mA

1500 – 10000 VOLTS

5 μsec

HIGH VOLTAGE RECTIFIER

FEATURES:

- Standard Recovery: 5 μsec Maximum
- PIV to 10000 Volts
- Hermetically Sealed
- Metallurgically Bonded
- 175°C Maximum Operating Temperature
- TX, TXV, and Space Level Screening Available^{2/}
- Limited Availability – Replacement Data Sheet: RC0197

ELECTRICAL CHARACTERISTICS

Part Number	Peak Inverse Voltage	Average Rectifier Current			Maximum Reverse Current		Maximum Forward Voltage	Maximum Surge Current (1 Cycle) 8.3 mS sine	Maximum Reverse Recovery Time	Maximum Junction Capacitance	Typical Thermal Impedance	
Symbol	PIV	IO			IR @ PIV		VF	IFSM	tRR	CJ	θJL	θJE
Units		mA			μA		Volts	Amps	μsec	pF		
Conditions	Volts	25°C	100°C		25°C	100°C	25°C	25°C	25°C	VR = 100V fT = 1MHZ	°C/W	
			L	SMS								
SHM15	1500	250	185	215	1.0	25	6	15	5	8	65	55
SHM20	2000	250	185	215	1.0	25	6	15	5	8	65	55
SHM25	2500	250	185	215	1.0	25	6	15	5	8	65	55
SHM30	3000	150	110	130	1.0	25	10	10	5	4	65	55
SHM40	4000	150	110	130	1.0	25	10	10	5	4	65	55
SHM50	5000	150	110	130	1.0	25	10	10	5	4	65	55
SHM60	6000	100	75	85	1.0	25	16	5	5	2	65	55
SHM80	8000	100	75	85	1.0	25	16	5	5	2	65	55
SHM100	10000	100	75	85	1.0	25	16	5	5	2	65	55

^{1/} For ordering information, price, operating curves, and availability – contact factory.

^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.

^{3/} Operating and testing over 10,000 V/inch may require encapsulation or immersion in a suitable dielectric material.


^{4/} Max. forward voltage measured with instantaneous forward pulse of 300μsec minimum.

^{5/} Max. lead temp. for soldering is 250°C, 3/8" from the case for 5 sec maximum.


^{6/} Operating and storage temperature: -65°C to +175°C.

^{7/} Reverse Recovery Test Conditions: IF=50mA, IR=100mA, IRR=25mA, TA=25°C.

Axial



SMS
(Square)



NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RV0007C

DOC



Solid State Devices, Inc.


14701 Firestone Blvd * La Mirada, Ca 90638

Phone: (562) 404-4474 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

**SHM15 - SHM100
and
SHM15SMS - SHM100SMS**

PACKAGE OUTLINE: AXIAL

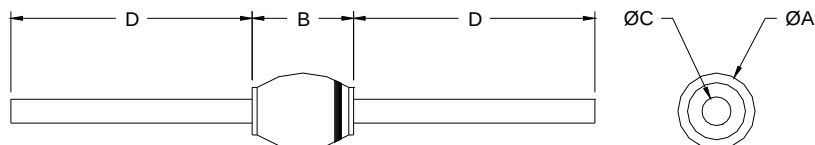


DIMENSIONS: SHM15-50

DIM	MIN	MAX
A	---	.140"
B	---	.300"
C	0.025"	0.033"
D	1.0"	---

DIMENSIONS: SHM60-100

DIM	MIN	MAX
A	---	.140"
B	---	.400"
C	0.025"	0.033"
D	1.0"	---

PACKAGE OUTLINE: SURFACE MOUNT SQUARE TAB

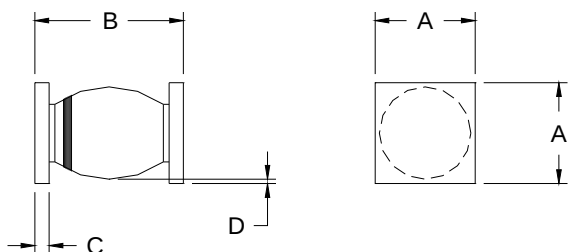

DIMENSIONS: SHM15-50

DIM	MIN	MAX
A	.127"	.140"
B	.280"	.320"
C	0.022"	0.028"
D	.002"	---

DIMENSIONS: SHM60-100

DIM	MIN	MAX
A	.127"	.140"
B	.360"	.450"
C	0.022"	0.028"
D	.002"	---

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RV0007C

DOC