



Solid State Devices, Inc.

14701 Firestone Blvd. * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SED20HE200CT1i Series

Designer's Data Sheet

Part Number / Ordering Information ^{1/}

SED20HE200CT **i** **---**

 L Screening ^{2/}
 --- = None
 TX = TX Level
 TXV = TXV Level
 S = S Level

 L i = Isolated Case

 L Lead Orientation
 1 = Front Mount
 2 = Side Mount
 3 = Split Mount

SURFACE MOUNT 20 AMP, 200 VOLTS CENTERTAP SCHOTTKY RECTIFIER

FEATURES:


- Low Reverse Leakage
- Low Forward Voltage Drop
- Hermetically Sealed, Isolated Power Surface Mount Package
- Guard Ring for Overvoltage Protection
- Eutectic Die Attach
- 175°C Operating Temperature
- Isolated Version (Hot Case Versions Available – Contact Factory)
- Smaller Footprint than TO-25X package
- Weight: 0.95 g typ
- TX, TXV, and Space Level Screening Available ^{2/}

MAXIMUM RATINGS (per leg)	Symbol	Value	Units
Peak Repetitive Reverse Voltage and DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (Resistive Load, 60 Hz, Sine Wave, $T_A = 100^\circ\text{C}$)	I_O	10	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, 1 pulse, $T_A = 25^\circ\text{C}$)	I_{FSM}	100	Amps
Operating and Storage Temperature	T_{OP} & T_{stg}	-55 to +175	°C
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	2.3 (typ 1.9)	°C/W


Notes:

^{1/} For ordering information, price, operating curves, and availability – Contact factory.
^{2/} Screening based on MIL-PRF-19500.
Screening flows available on request.


SED20HE200CT1i
Front Mount

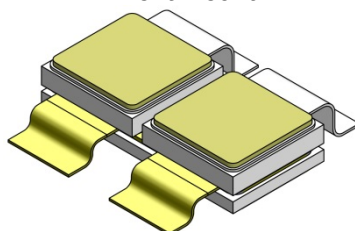

SED20HE200CT2i
Side Mount



SED20HE200CT3i
Split Mount



Physical Properties:

Body: Alumina
Lead: Copper, Ag plated with Ni under-plate
Bottom Isolation: AlN DBCu, Tin-Lead finish with Nickel under-plate

Key:

White = Anode
Yellow = Cathode

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: SH0105A

DOC



Solid State Devices, Inc.

14701 Firestone Blvd. * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SED20HE200CTi Series

ELECTRICAL CHARACTERISTICS (per leg)		Symbol	Typical	Maximum	Unit
Instantaneous Forward Voltage Drop ($I_F = 5 A_{DC}$, 300 - 500 μ sec pulse)	$T_A = -55^\circ C$	V_{F1}	0.92	-	V_{DC}
	$T_A = 25^\circ C$	V_{F2}	0.75	0.80	
	$T_A = 125^\circ C$	V_{F3}	0.61	0.70	
Instantaneous Forward Voltage Drop ($I_F = 10 A_{DC}$, 300 - 500 μ sec pulse)	$T_A = -55^\circ C$	V_{F4}	1.00	-	V_{DC}
	$T_A = 25^\circ C$	V_{F5}	0.78	0.85	
	$T_A = 125^\circ C$	V_{F6}	0.68	0.75	
Instantaneous Forward Voltage Drop ($I_F = 20 A_{DC}$, 300 - 500 μ sec pulse)	$T_A = -55^\circ C$	V_{F7}	1.24	-	V_{DC}
	$T_A = 25^\circ C$	V_{F8}	0.85	0.95	
	$T_A = 125^\circ C$	V_{F9}	0.76	-	
Reverse Leakage Current (Rated V_R , 300 μ sec pulse minimum)	$T_A = 25^\circ C$	I_{R1}	0.7	10	μA
	$T_A = 100^\circ C$	I_{R2}	0.2	-	mA
	$T_A = 125^\circ C$	I_{R3}	0.85	5	mA
Junction Capacitance ($T_A = 25^\circ C$, $f = 1$ MHz)	$V_R = 5V$	C_{J1}	185	225	pF
	$V_R = 10V$	C_{J2}	135	-	

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: SH0105A

DOC




Solid State Devices, Inc.

14701 Firestone Blvd. * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SED20HE200CTi Series


CASE OUTLINE: SED20HE200CT1i

Front Mount

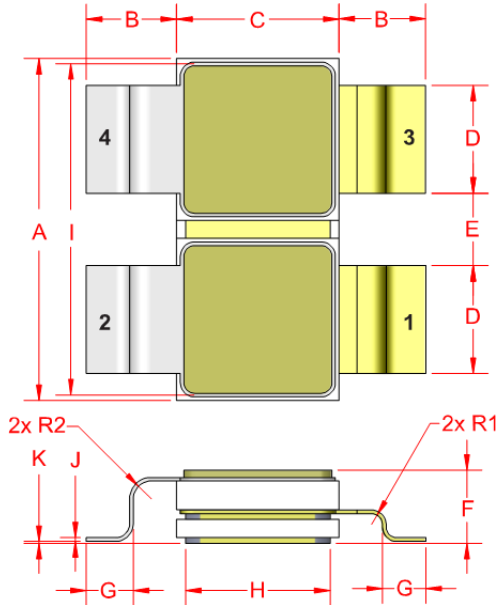


CASE OUTLINE: SED20HE200CT2i

Side Mount

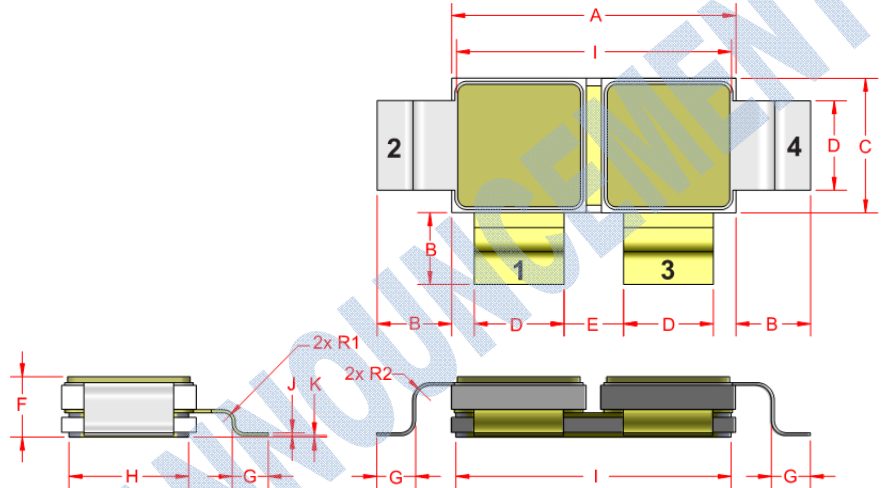

CASE OUTLINE: SED20HE200CT3i

Split Mount

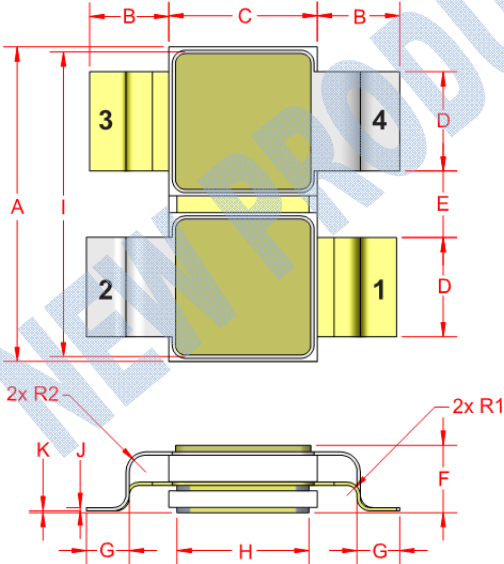

DIMENSIONS

DIM	MIN	MAX
A	0.465	0.560
B	0.125	0.145
C	0.200	0.235
D	0.140	0.160
E	0.090	0.110
F	-	0.135
G	0.055	0.075
H	0.200	0.210
I (bottom Cu pad)	0.450	0.460
J	0.005	0.008
K	-0.002	0.008

R1

R 0.015 REF

R2

R 0.025 REF

PIN ASSIGNMENT

Pin 4 ● Pin 3

Pin 2 ● Pin 1

Pin 1 & Pin 3 tied together

Configuration	Pin 1 & Pin 3 (tied together)	Pin 2	Pin 4
Common Cathode (CT)	Cathode	Anode	Anode

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: SH0105A

DOC